



**CS&P Technologies**



## ***Coiled Tubing Reel Purging Skid***

*Our compact unit is a low cost solution for purging coiled tubing reels. The industry has historically used larger units and now our smaller unit does the job better at a lower cost.*

*As with all of our units, the attention to detail ensures a properly designed system that lowers operating cost and maintenance making it the most reliable in the industry.*

### **FEATURES**

- Cost effective alternative to high rate units
- Allows maximum utilization of existing nitrogen fleet
- Designed for use in multiple pumping applications
- Minimal operating cost
- Simple operation
- Low maintenance design
- Compact design allows versatility in packaging

### **PERFORMANCE SPECIFICATIONS**

- Fluids Pumped: Nitrogen
- Maximum Flow Rate: 650 SCFM (7 GPM)
- Continuous Working Pressure: 3,600 PSI (6,000 PSI MAWP)

### **CS&P MANUFACTURED NITROGEN COMPONENTS**

#### **Duplex Pump**

- 2-ICP-100 with 1.25" Cold Ends

#### **Centrifugal Pump**


- 1" x 2" x 4.5" Mechanical Seal or "Sealless" Magnetic Drive Option

#### **Vaporizer**


- 40,000 SCFH Continuous Duty Forced Air Ambient Vaporizer

18119 Telge Road • Cypress, Texas 77429  
Office (713) 467-0869 • Fax (713) 464-2089  
[www.csphouston.com](http://www.csphouston.com)

# Coiled Tubing Reel Purging Skid

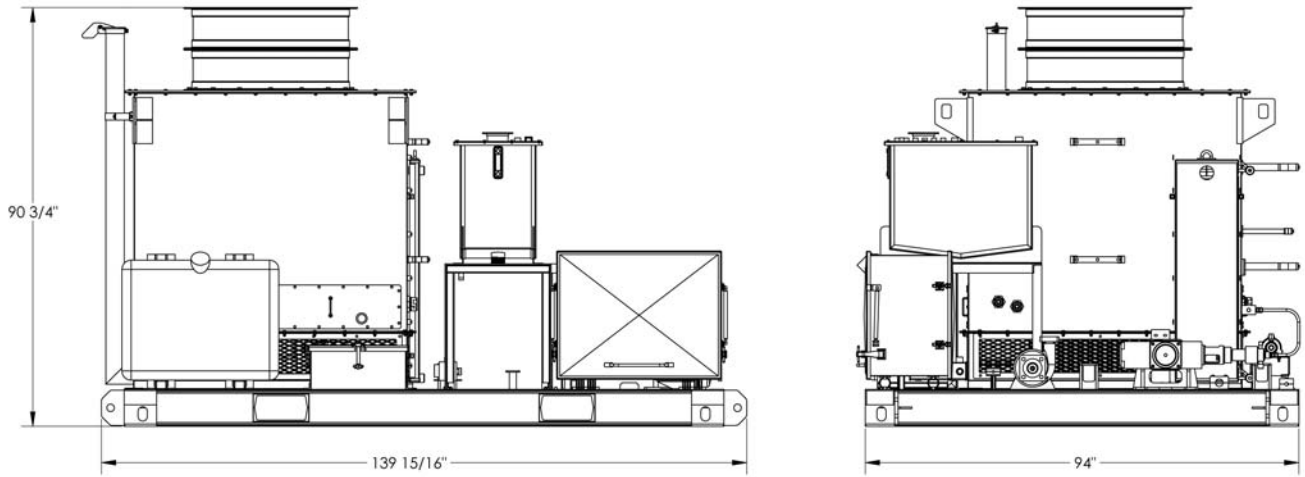

APPROX WEIGHT: 9,500 LBS

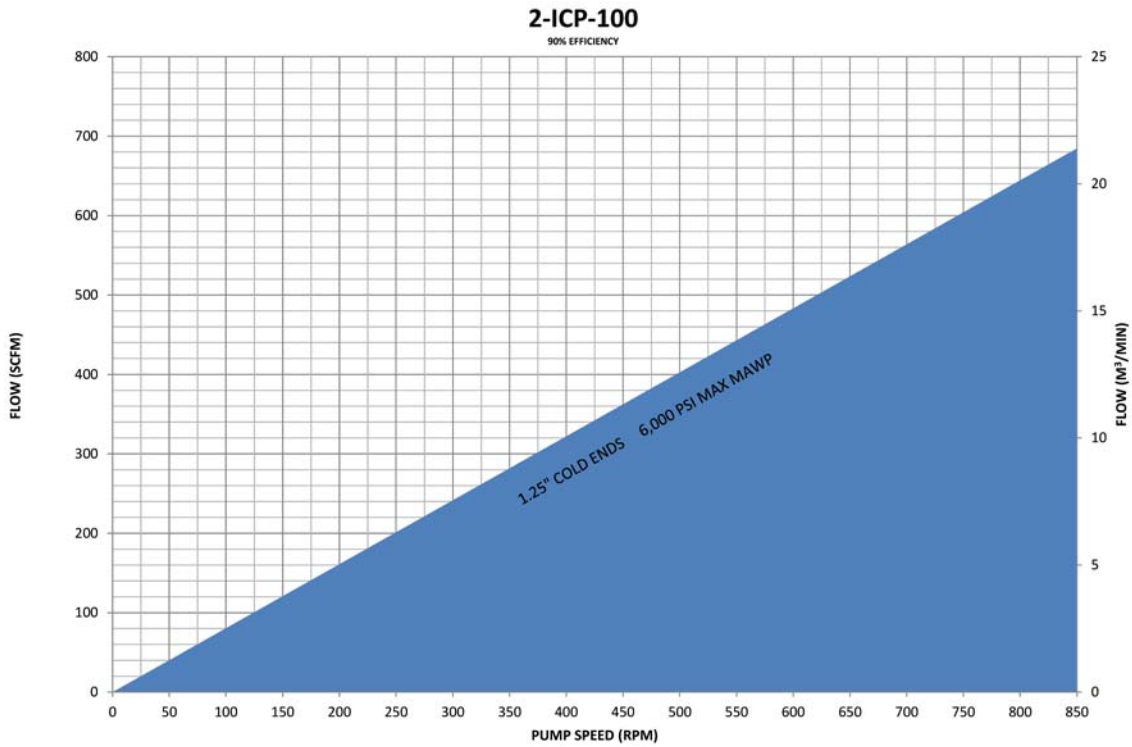

**CS&P Technologies**

18119 Telge Road • Cypress, Texas 77429  
Office (713) 467-0869 • Fax (713) 464-2089  
[www.csphouston.com](http://www.csphouston.com)